



Technical Features

# F-LINE 4x2 Road Series



\*The vehicle image may differ from the actual vehicle.

Technical Features	1833		
	Day Cab	Low Roof Sleeper Cab	Crew Cab
<b>Engine</b>			
Type	GEN1.5 Ecotorq Euro 5 115 mm x 144 mm	GEN1.5 Ecotorq Euro 5 115 mm x 144 mm	GEN1.5 Ecotorq Euro 5 115 mm x 144 mm
Displacement (cc)	8.974 cm3	8.974 cm3	8.974 cm3
Power PS (kW)	330 PS (243 kW) @ 1900 d/d	330 PS (243 kW) @ 1900 d/d	330 PS (243 kW) @ 1900 d/d
Torque	1400 Nm @ 1200-1650 d/d	1400 Nm @ 1200-1650 d/d	1400 Nm @ 1200-1650 d/d
<b>Powertrain</b>			
Clutch	430 mm Single Disc	430 mm Single Disc	430 mm Single Disc
Transmission / Ratios	Automated: ZF 9S 14409 (9,48 - 0,75) Manual: Eaton 9S 13209 (9,40 - 0,75)	Automated: ZF 9S 14409 (9,48 - 0,75) Manual: Eaton 9S 13209 (9,40 - 0,75)	Automated: ZF 9S 14409 (9,48 - 0,75) Manual: Eaton 9S 13209 (9,40 - 0,75)
Forward and Reverse Gear	Automated: 9 forward + 1 reverse Manual: 9 forward + 1 reverse	Automated: 9 forward + 1 reverse Manual: 9 forward + 1 reverse	Automated: 9 forward + 1 reverse Manual: 9 forward + 1 reverse
FDR	4,11	4,375	4,375
<b>Axle &amp; Suspension</b>			
Axle Configuration	4x2	4x2	4x2
Front Axle	7,5 T	7,5 T	7,5 T
Rear Axle	XSS - 470, 11.5 T	XSS - 470, 11.5 T	XSS - 470, 11.5 T
Suspension	Parabolic Front Leaf Spring / Multileaf Spring Rear Suspension	Parabolic Front Leaf Spring / Multileaf Spring Rear Suspension	Parabolic Front Leaf Spring / Multileaf Spring Rear Suspension
<b>Brakes</b>			
Brake System	Dual Brake Circuit - Air Processing Unit With Integrated Oil Separator and Heater	Dual Brake Circuit - Air Processing Unit With Integrated Oil Separator and Heater	Dual Brake Circuit - Air Processing Unit With Integrated Oil Separator and Heater
Service Brake	Front and Rear Disc Brakes	Front and Rear Disc Brakes	Front and Rear Disc Brakes
Brakes (Front/Rear) (Ø.mm x mm. Length)	430 x 45 - Disc Brake	430 x 45 - Disc Brake	430 x 45 - Disc Brake
Engine Brake Power	max. 220 kW (Engine Level)	max. 220 kW (Engine Level)	max. 220 kW (Engine Level)
Hydraulic Retarder	-	-	-
<b>Fuel &amp; AdBlue Tank</b>			
Fuel Tank	350L, Right Hand Side, Aluminum	350L, Right Hand Side, Aluminum	350L, Right Hand Side, Aluminum
SCR Tank	55 L	55 L	55 L
<b>Chassis</b>			
Thickness and Material	U Profile, High Strength, 7 mm Thickness	U Profile, High Strength, 7 mm Thickness	U Profile, High Strength, 7 mm Thickness
<b>Tires</b>			
Front Axle	315/80 R 22,5	315/80 R 22,5	315/80 R 22,5
Rear Axle	315/80 R 22,5	315/80 R 22,5	315/80 R 22,5
Rims	22.5X9.0 Steel	22.5X9.0 Steel	22.5X9.0 Steel

# Standard and Optional Features

April 2026


Standard and Optional Features	1833		
	Day Cab	Low Roof Sleeper Cab	Crew Cab
<b>Safety &amp; Technology</b>			
Electronic Stability Program (ESP)	•	•	•
Electronic Brake System with ABS & ATC (EBS)	•	•	•
Differential Lock	•	•	•
<b>Interior</b>			
Multimedia System with 9" Touch Screen (DAB Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)	○	○	○
Navigation	○	○	○
12" Ghost Cluster	•	•	•
Improved Sound and Heat Insulation	•	•	•
Air Conditioning	•	•	•
Dry & Wet Type Cab Heater	-	○	○
Dry Type Cab Heater	-	•	•
Wet Type Cab Heater	○	○	○
Dual Passenger Seat	○	-	-
Driver Seat Armrest	○	•	•
Axle Load Measurement Device	•	•	•
Adjustable Steering Wheel	•	•	•
Mattress Topper for Lower Bed	-	○	○
Driver Seatbelt Warning System	•	•	•
Single Bed (Without Upper Storage Areas)	-	•	•
Power Windows & Remote Height Adjustment	•	•	•
Side Window Dimmings	•	•	•
Bed Side Remote Control System	-	•	•
Interior Lighting with Reading and Night Light Functions	-	•	•
Multi-Function Remote Control Key, 2 pieces	•	•	•

Standard and Optional Features	1833		
	Day Cab	Low Roof Sleeper Cab	Crew Cab
Exterior			
Heated and Electrically Controlled Side Mirrors	●	●	●
Spoiler	○	-	-
200L Aluminum Fuel Tank (Right Side)	○	-	○
350L Steel Fuel Tank (Right Side)	●	●	●
400L Aluminum Fuel Tank (Right Side)	○	-	○
480L Aluminum Fuel Tank (Right Side)	-	-	○
550L Aluminum Fuel Tank (Right Side)	○	-	○
3,7 FDR	○	-	○
4,11 FDR	●	-	-
4,375 FDR	○	○	●
4,63 FDR	○	●	○
315/60 R 22,5 Tire	○	○	○
315/80 R 22,5 Tire	○	●	●
7,5 Ton Front Axle Capacity (Below 5501 mm WB)	●	●	●
8 Ton Front Axle Capacity (Below 5501 mm WB)	○	○	○
Rear Air Suspension (C4AS)	○	○	○
3800 mm Wheelbase	○	-	-
4250 mm Wheelbase	●	○	-
4350 mm Wheelbase	-	-	●
4750 mm Wheelbase	○	●	○
5500 mm Wheelbase	○	○	-
6550 mm Wheelbase	○	○	-
Vertical Exhaust	○	-	-
Engine PTO	○	○	○
Twin PTO (Low and High Ratio)	○	○	○
NH4B Offset PTO with Flange (Double Gear)	○	○	○
NH4C Offset PTO without Flange (Double Gear)	○	○	○
Remote Engine Start Stop Function	●	●	●
Remote Transmission PTO Start-Stop function	●	●	●
Hydraulic Cab Tilting	●	●	●
Electrically Operated Cab Tilting	○	○	○
FL, EX/II, OX & AT Classification ADR Package	○	○	○
Without Front Spare Tire	○	○	○
Front Spare Tire / Rim	●	●	●
LED Headlamps	○	○	○
Halogen Headlamps	●	●	●
Tail (Rear Stop) Lamp	●	●	●
Rain Sensor & Autolamps	●	●	●
EFB (240 Ah) Battery	●	●	●
Full Trailer - O3 (up to 10T towing capability)	○	○	○


Standard and Optional Features	1833		
	Day Cab	Low Roof Sleeper Cab	Crew Cab
Exterior			
Engine Air Filter without Interpipe (Powercore)	○	-	-
Switchable Air Brake Compressor	-	-	-
Digital Tachograph	●	●	●
Medium Bumper	●	●	●
Body Color Bumper	-	●	●
Torq Black Bumper	●	○	-
Cold Pack	○	○	○
Residual Collection Pack	○	○	○
Special Residual Collection Pack	○	-	-
Rear Towing Hooks	○	○	○
Front Towing Hook	○	○	○
Double Front Towing Hooks	○	○	○
Beacon Lamp	○	-	-
Double Roof Beacon Lamp (Passenger Side Lamp & Driver Side Infrastructure)	○	○	○

● Standard ○ Optional

1833 DC

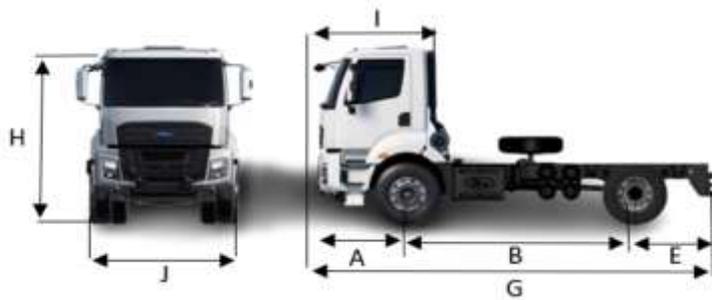

1833 LRSC

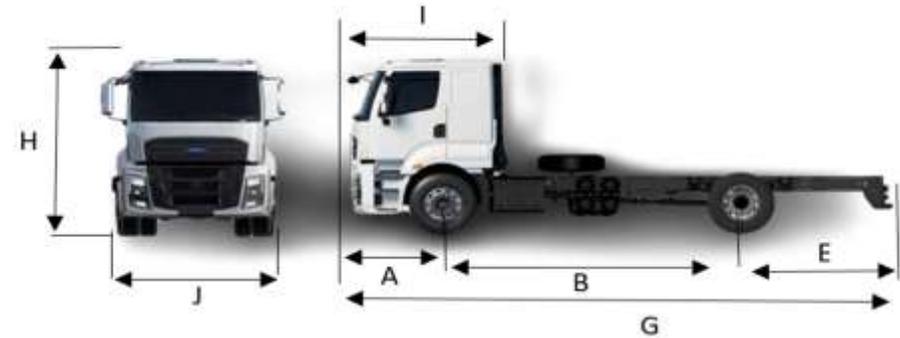

Dimensions (mm)	1833		
	Day Cab	Low Roof Sleeper Cab	Crew Cab
Wheelbase (B)	4250	4750	4350
Overall Length (G)	7990	8750	8050
Front Overhang (A)	1450	1450	1450
Rear Overhang (E)	2300	2550	2250
Distance Between 1st and 2nd Wheel Centers (B)	4240	4750	4350
Overall Vehicle Width (Excluding Mirrors) (J)	2540	2540	2540
Overall Cab Length (I)	0	2260	2693
Total Vehicle Height (H)	3123	3148	3148
Turning Radius	8580	9350	8680

Weights (kg)		1st Axle	2nd Axle	Total
1833 (Day Cab)	Technically Permissible Weight	7500	12600	19000
	Kerb Weight	4646	2102	6748
	Payload	2854	10498	12252
	Regulatory Permissible Weight	7500	11500	18000
1833 (Low Roof Sleeper Cab)	Technically Permissible Weight	7500	12600	19000
	Kerb Weight	4831	2495	7325
	Payload	2669	10105	11675
	Regulatory Permissible Weight	7500	11500	18000
1833 (Crew Cab)	Technically Permissible Weight	7500	12600	19000
	Kerb Weight	4862	2432	7294
	Payload	2974	9967	11841
	Regulatory Permissible Weight	7500	11500	18000

\*The kerb weight data includes a 90% full fuel tank, other fluids, tools, a spare tire, and a driver weighing 75 kg. Weight values may vary depending on the vehicle configuration.

This leaflet includes products designed for Ford vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications provided herein are for standard vehicles. Selection of any optional accessories might cause differences from these specifications.

